T型•丸型• 小型

アジャスト

ジョイント・ リンク・ワイヤ



A-484-A-1-TAK60



‡−No.TAK60 Key



‡−No.R0220 Key

## 特徴 Featur

- 錠前は操作性に優れた防塵シャッター付新型リバー シブルキーTAK60を標準装備(A-484-A-TAK60)
- 防水タイプ(○リング・シートパッキン使用)
- 左右兼用型(カムと止め金を裏返すと左右の入替えができます。)
- The lock comes standard with the TAK60, a new-style reversible key with an easy-to-use dustproof shutter. (A-484-A-TAK60)
- Waterproof. (Using O-ring and sheet packing)
- For both left-hand and right-hand use. (The left-hand and right-hand use can be changed by reversing the cam and stopper plate)

● 材 質: 亜鉛合金(ZDC)

●表面仕上:アクリル系樹脂焼付塗装(ブラック)

● 最大適用板厚: 2.3mm

● 付 属 品:キー2本・ビスセット・止め金・取付け板

■途 ●キュービクル・配分電盤・制御盤

● 標準在庫品

▼マスターシステム、指定同番、鍵違いも製作します。

本製品の止め金取付け用ねじは、緩み防止の ため「緩み防止剤」の塗布をお奨めします。

Material: Zinc alloy (ZDC)


• Finish: Acrylic resin baked (black)


• Max. applicable panel thickness: 2.3mm


 Accessories: Two keys, screws, stopper plate and installation plate


Specific use • Cubicles, distribution boards and control boards Remarks • It is recommended that thread-locking fluid

It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

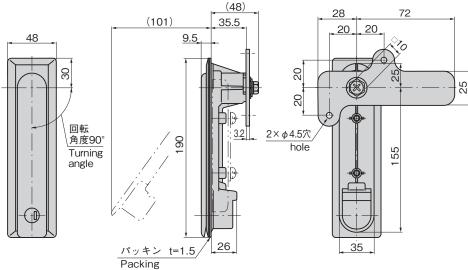







商品番号 Product No.	RoHS		付属止め金 Attached stopper plate	製品質量(g) Mass	コード Code
A-484-A-1-TAK60		TAK60	AC-25-F-1	830	04093
A-484-A-1		R0220	AC-25-E-1	830	01216



