


カジリ防止 止め金装備



A-250-A-1-1



A-250-A-2-1

キーNo.0200
Key

高負荷タイプUベロもあります
High-load type with U-rims also available
AC-25-U(644ページ)

特徴 Feature

- 止め金はカジリ防止タイプを標準装備
- パネル穴明け寸法はA-240と同じです。
- 左右兼用型(止め金を裏返すと左右の入替えができます。)
- Anti-seizing type stopper plate is standard.
- Panel drilling dimensions are same as A-240.
- For both left-hand and right-hand use. (The left-hand or right-hand use can be changed by reversing the stopper plate)

仕様

- 材 質: 亜鉛合金 (ZDC)
- 表面仕上: サチライトクロムめっき (MZCr)
- 付 属 品: キー2本・ビスセット・専用止め金

用途

- 配分電盤・制御盤

納期

- 標準在庫品

備考

- 摺動部には潤滑油をご使用ください。特に塗料の付着にはご注意ください。
- 本製品の錠前はキー先端部での操作となります。
- 鍵を必要以上に回転させると錠前部・鍵先端部が破損する恐れがありますのでご注意ください。
- 本製品の止め金取付け用ねじは、緩み防止のため「緩み防止剤」の塗布をお奨めします。

Speci-

- Material: Zinc alloy (ZDC)
- Finish: Satellite chrome plating (MZCr)
- Accessories: Two keys, screws and special stopper plate

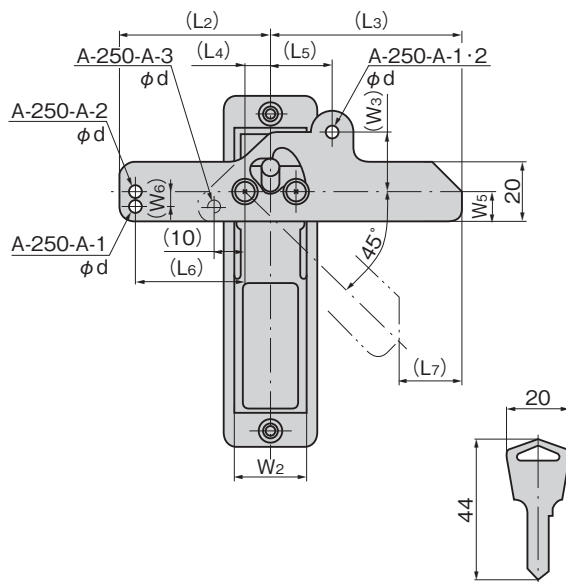
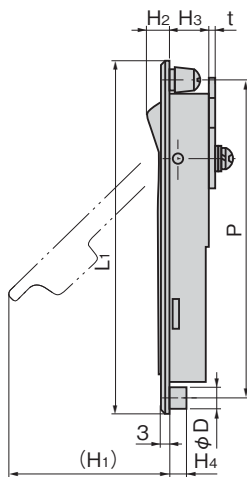

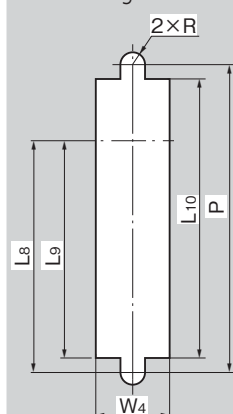
Specific use

- Power/distribution and control boards

Remarks

- Use lubrication oil for moving parts. Especially be careful of sticking coating.
- The lock on this product is operated with the tip of the key.
- Note that care is required, since turning the key more than is necessary risks damaging the lock or the tip of the key.
- It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.

商品番号 Product No.	RoHS 10	鍵番号 Key No.	付属止め金 Attached stopper plate	コード Code
A-250-A-1-1	●	0200	AC-25-AB-1N	01773
A-250-A-1-2	●	鍵なし Without lock		01776
A-250-A-2-1	●	0200	AC-25-AB-2N	01774
A-250-A-2-2	●	鍵なし Without lock		01392
A-250-A-3-1	●	0200	AC-25-AB-3N	01775
A-250-A-3-2	●	鍵なし Without lock		01394

パネル穴明け寸法
Panel drilling dimensions

商品番号 Product No.	L ₁	(L ₂)	(L ₃)	(L ₄)	(L ₅)	(L ₆)	(L ₇)	L ₈	L ₉	L ₁₀	W ₁	W ₂	(W ₃)	W ₄	W ₅	(W ₆)	(H ₁)	H ₂	H ₃	H ₄	t	P	φD	φd	R	適用板厚 Applicable panel thickness	製品質量(g) Mass	
A-250-A-1-1	142	49.5	65.5	9.5	18	34.5	25.5	93	87.5	117	32	26	22	27	15	5	70	10	17	7	3.2	128	8	2-φ4.2	4.5	1.0~2.5	360	
A-250-A-1-2	117	48.5	61.5	8.5	20	35	20.5	79	74.5	96	30	23	20	24	10	58	8	12.5	6	2.3	105	7	2-φ4.2	4	1.0~2.5	235		
A-250-A-2-1		84	61.5	8.5	20	35	20.5	79	74.5	96	30	23	20	24	9.5		4.5	35	8	12.5	6	2.3	72	7	φ4.1	4	1.0~2.5	155
A-250-A-2-2																												
A-250-A-3-1	84	61.5	8.5	20	35	20.5	79	74.5	96	30	23	20	24	9.5	4.5	35	8	12.5	6	2.3	72	7	φ4.1	4	1.0~2.5	155		
A-250-A-3-2																												

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。