



(一社)日本配電制御システム工業会 非常用配電盤等機器認定委員会登録品
耐火形扉用把手



A-1172-2



A-172-H


特徴 Feature

- 防水タイプ(Oリング・パッキン使用)
- ロック時は内蔵されたクラッチ機構により止め金が固定
- 耐火・耐熱・耐塩・耐酸
- 左右兼用型
- Waterproof (using O-ring and packing)
- Stopper plate is secured with the built-in clutch mechanism when locking.
- Fire-resistant, heat-resistant, saltwater-resistant and acid-resistant.
- For both left-hand and right-hand use.


仕様	● 材 質: 本体/ステンレス鋼铸件(SUS304) ハンドル/冷間圧延鋼板(SPCC) ABS樹脂カバー付
	● 表面仕上: 本体/切削加工 ハンドル/クロムめっき(MFCr)
用途	● 最大適用板厚: A-1172-2/7.5mm A-1172-3/11.5mm
	● 付 属 品: 大ナット・ビスセット
納期	● 配分電盤・制御盤
備考	● 標準在庫品
備考	● SUS316も製作します。製作ロットはご相談ください。
	● 本製品の止め金取付け用ねじは、緩み防止のため「緩み防止剤」の塗布をお奨めします。

Specifications	● Material: Main body: Cast stainless steel (SUS304) Handle: Cold rolled steel plate (SPCC) with ABS resin cover
	● Finish: Main body: Cutting Handle: Chrome plating (MFCr)
	● Max. applicable panel thickness: A-1172-2: 7.5mm. A-1172-3: 11.5mm
Specific use Remarks	● Accessories: Large nut and screws
	● Distribution and control boards
Remarks	● It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.


[A-1172-2]

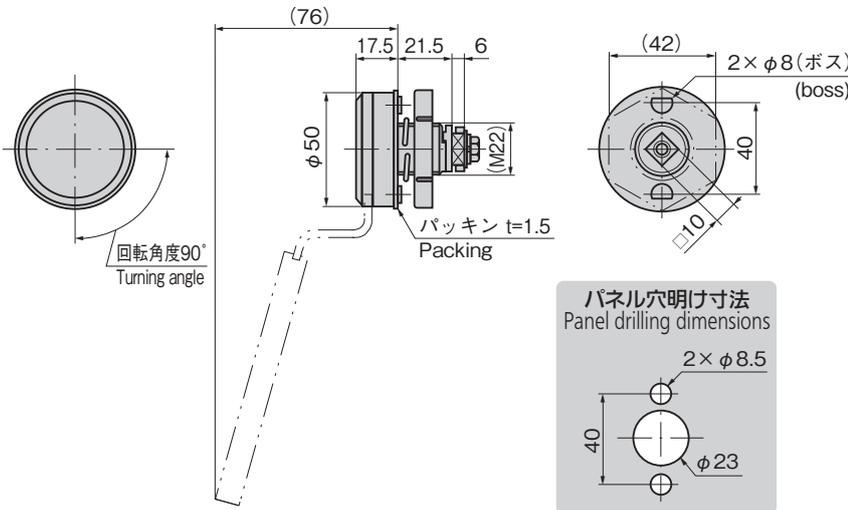

[A-1172-3]

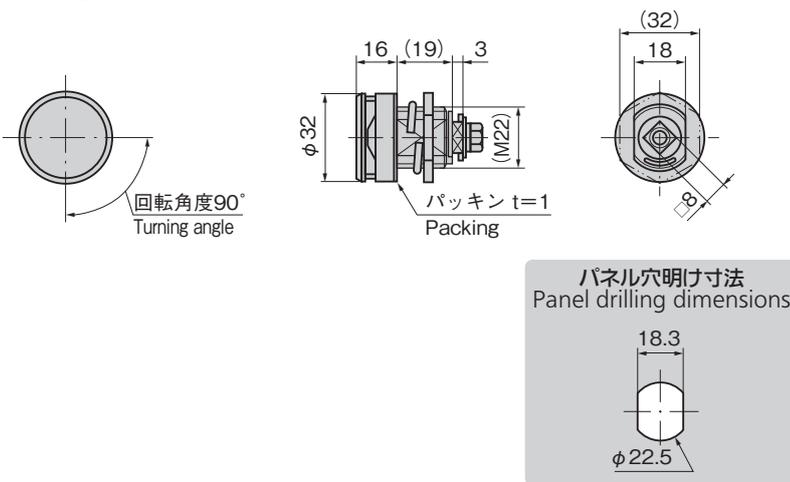

[A-172-H]

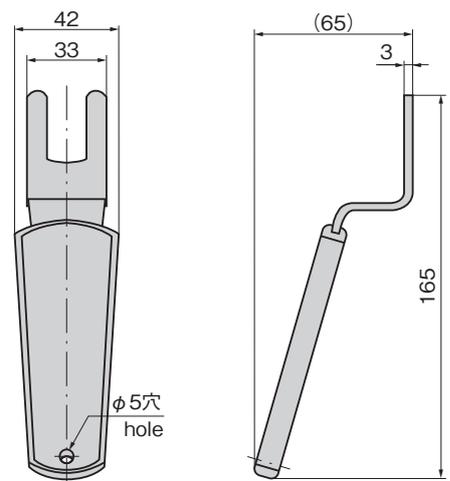

商品番号 Product No.	RoHS 10	備 考 Remarks	製品質量(g) Mass	コード Code
A-1172-2	●	● 本体 Main body	290	00758
A-1172-3	●	● 本体 Main body	140	00759
A-172-H	●	● ハンドル Handle	120	00376

**止め金
Stopper
plate**

止め金は640~644ページの□8穴の中から
お選びください。
Select stopper plate from those starting
on page 640 to 644 with □8 hole.

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。
※品番が変更になりました。 A-1172-1 → A-1172-2 A-1172-2 → A-1172-3
※ Product No. A-1172-1 has changed to A-1172-2. A-1172-2 has changed to A-1172-3.