



亜鉛合金製



Key

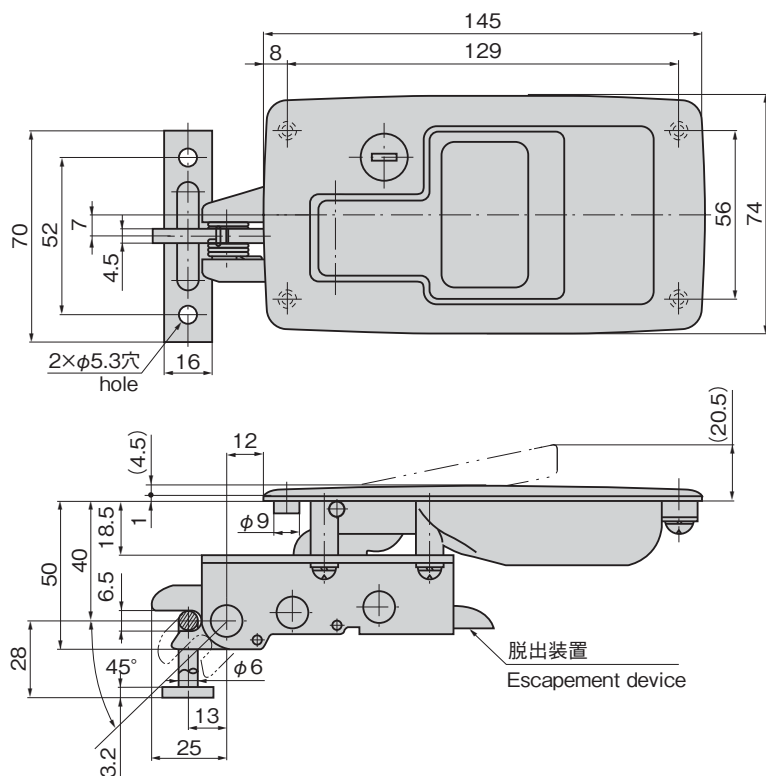

●: RoHS10指令対応品
▲: RoHS10指令に対応可能です。

- 防塵シャッター付錠前を標準装備
- 全体にアールのついたソフトなデザイン
- 振動・衝撃などに強いスナッチロック式の平面ハンドルです。
- 扉はワンタッチで開閉できます。
- A-154-Bと取付けに互換性があります。

- The handle has a lock and dustproof shutter.
- Corners with a radius make a soft image.
- It's a snatch lock type flush handle so it's resistant against vibration and impact.
- One-touch door opening/closing.
- Installation is compatible with A-154-B.

仕様	●材 質:亜鉛合金(ZDC)
	●表面仕上:焼付塗装
	●標 準 色:ブラック
	●鍵 番 号:0200
	●最大適用板厚:1.5mm
	●付 属 品:キー2本・受座
	●製品質量:815g
用途	●保冷車・冷凍冷蔵庫車・農耕車用
納期	●標準在庫品
備考	●指定同番・鍵違いも製作します。
	●永くご使用いただくために定期的に摺動部に高性能潤滑剤C-985(1438ページ)を塗布してください。

Specifications	● Material: Zinc alloy (ZDC) ● Finish: Baked ● Standard color: Black ● Key No.: 0200 ● Max. applicable panel thickness: 1.5mm ● Accessories: Two keys and catch ● Mass: 815g
Specific use	● Cold storage, freezer and farm vehicles
	● To prolong the life of the product, apply a regular coating of high-performance lubricant C-985 (P. 1438) to the sliding parts.

Technical drawing of a mechanical part with the following dimensions and labels:

- Overall width: 129
- Overall height: 56
- Left side dimensions: 5 (outer radius), 11 (inner radius)
- Right side dimensions: 5 (outer radius), 4 × R5 (fillet)
- Center line: 基準線 (Reference line)

脱出装置を押すだけでロック解除
The lock is released by pushing
the escapement device.

取付けが簡単
It's easy to install.

取付けが簡単
It's easy to install.