



A-309-1S-1-SP



A-309-2D-1-SP

キーNo.T0230
Key

特徴 Feature

- 突起のないフラットなデザイン
- 押ボタンによるワンタッチオープン
- 扉の密閉が調整ねじで微調整できます。
- 防水タイプ (Oリング・パッキン使用)
- 錠前は防塵シャッター付リバーシブルキー
- Flush type Non-protrusion from the panel surface
- One-touch unlocking by pushing the button.
- Fine adjustment of the door tightness can be made with the adjustment screw.
- Waterproof (O-ring and packing are used)
- Lock has a reversible key and dustproof shutter.

仕様

- 材 質: 亜鉛合金 (ZDC)
- 表面仕上: アクリル系樹脂焼付塗装
- 適用板厚: 1~4mm
- 付 属 品: キー2本

用途

- 保温・防塵など、強力密閉を必要とする機器・振動機器・特装車・エンジン発電機

納期

- 標準在庫品

Speci-


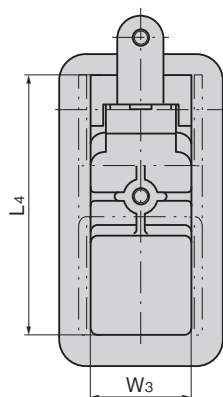
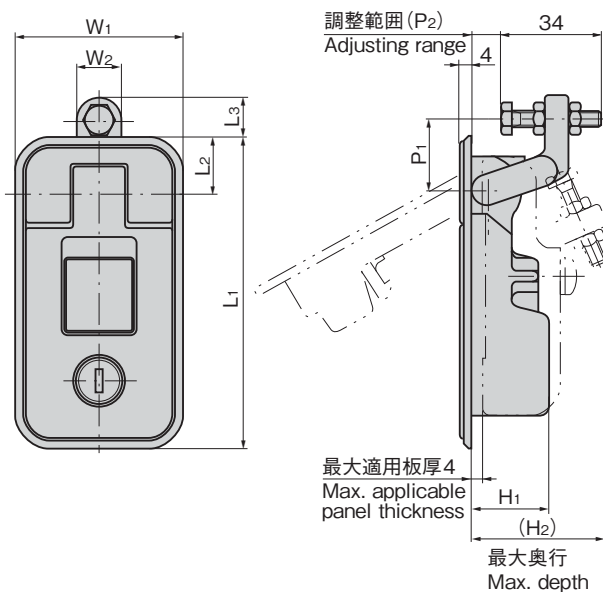

fications

- Material: Zinc alloy (ZDC)
- Finish: Acrylic resin baked
- Applicable panel thickness: 1 to 4 mm
- Accessories: Two keys

Specific-

use

- Any device which needs thermal insulation, dustproof or tight sealing, oscillation devices and specially equipped vehicles, engine dynamo

パネル穴明け寸法
Panel drilling dimensions

商品番号 Product No.	RoHS 10	備 考 Remarks	L1	L2	L3	L4	L5	L6	W1	W2	W3	W4	H1	(H2)	P1	P2	製品質量(g) Mass	コード Code
A-309-1S-1-SP	●	鍵付き With lock	109	20	13	90	91	12	56	16	34	35	27	51	25	0~15	480	04656
A-309-1S-2-SP	●	鍵なし Without lock			28									71	40	15~30	475	04657
A-309-1D-1-SP	●	鍵付き With lock	85.5	19	12.5	70	71	11	41	12	24	25	26	51	25	0~15	490	04654
A-309-1D-2-SP	●	鍵なし Without lock			28									71	40	15~30	485	04655
A-309-2S-1-SP	●	鍵付き With lock	85.5	19	12.5	70	71	11	41	12	24	25	26	51	25	0~15	280	04660
A-309-2S-2-SP	●	鍵なし Without lock			28									71	40	15~30	275	04661
A-309-2D-1-SP	●	鍵付き With lock	85.5	19	12.5	70	71	11	41	12	24	25	26	51	25	0~15	290	04658
A-309-2D-2-SP	●	鍵なし Without lock			28									71	40	15~30	285	04659

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。