




C-209-1



C-209-3

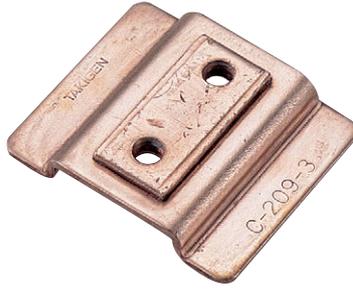

C-209-5



C-1209-15



C-1209-14



C-1209-13



C-209-14



C-209-24




C-209-31



C-209-32






C-209-33

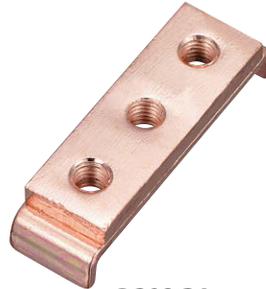

C-209-34



C-209-35

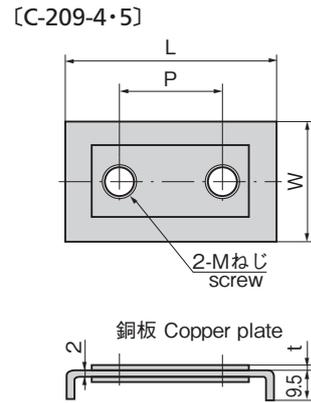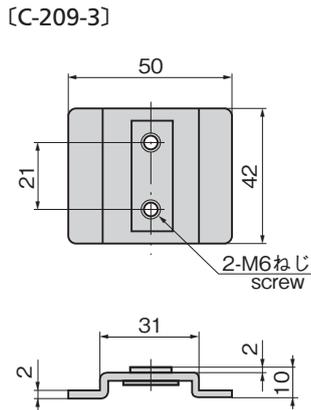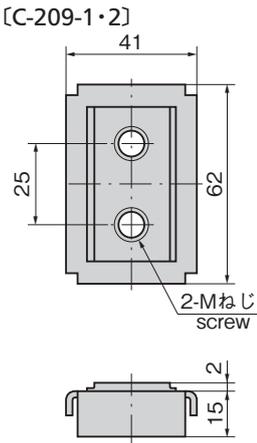


商品番号 Product No.	RoHS 10+	L	W	P	t	M	製品質量(g) Mass	コード Code	単価	量販価格	
										数量	単価
C-209-1	●	/	/	/	/	M10	90	20512			
C-209-2	●	/	/	/	/	M8	90	20513			
C-209-3	●	/	/	/	/		50	20514			
C-209-4	●	64	37	25	2	M10	74	21190			
C-209-5	●	50	23	21	2	M6	38	21191			

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。 ※大量のご注文は更にお安くなります。


基準定格電流(A) Standard rated current	ねじの呼び(最小) Screw nominal size(Min.)	接地線の最小太さ Minimum ground wire thickness	
		単線の呼び径(mm) Solid wire nominal dia.	より線の公称断面積(mm ²) Stranded wire nominal sectional area.
50以下 50 or less	M5	2	—
50を超え100以下 More than 50, 100 or less		2.6	—
100を超え225以下 More than 100, 225 or less	M6	—	14
225を超え400以下 More than 225, 400 or less		—	22
400を超え600以下 More than 400, 600 or less	M8	—	38
600を超え750以下 More than 600, 750 or less		—	60

国土交通省 公共建築工事標準仕様書準拠品


[C-209-11~15]

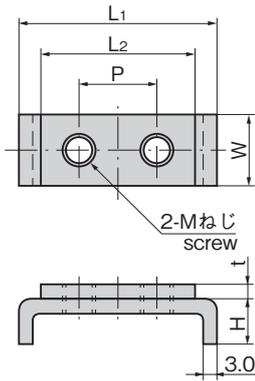


[C-1209-13~15]

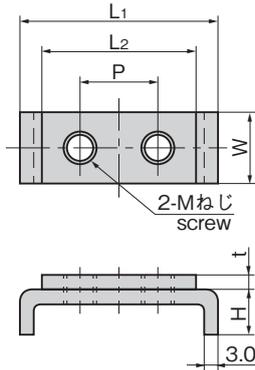


[C-209-21~25]

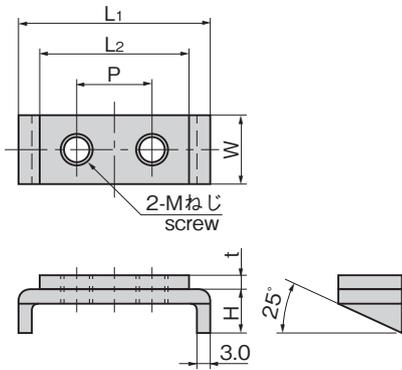

[C-209-31~35]

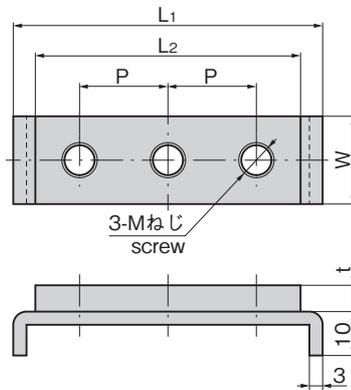

[C-209-41・43]

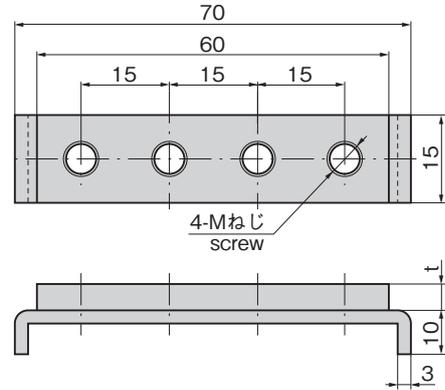

[C-1209]

- 仕様
- 材質: ステンレス鋼板(SUS304)
接続部は銅ブスパー(C1100BB)
 - 表面仕上: 銅めっき

[C-209]

- 仕様
- 材質: 冷間圧延鋼板(SPCC)
接続部は銅ブスパー(C1100BB)
 - 表面仕上: 銅めっき
- 用途
- 配分電盤・キュービクル
- 納期
- 標準在庫品

[C-1209]

- Specifications
- Material: Stainless steel plate (SUS304)
Connecting section: Copper buss bar (C1100BB)
 - Finish: Copper plating

[C-209]

- Specifications
- Material: Cold rolled steel plate (SPCC)
Connecting section: Copper buss bar (C1100BB)
 - Finish: Copper plating
- Specific use
- Power/distribution boards and cubicles

商品番号 Product No.	RoHS 10+	L1	L2	W	H	P	t	M	製品質量(g) Mass	コード Code	単価	量販価格	
												数量	単価
C-1209-13	●	40	30	15	10	15	6	M6	38	23664			
C-1209-14	●	50	40	20	10	20	6	M8	66	23665			
C-1209-15	●	60	50	25	10	25	10	M10	132	23666			
C-1209-23	●	40	30	15	13	15	6	M6	37	24010			
C-1209-24	●	52	40	20	15	20	6	M8	64	24011			
C-209-11	●	40	30	15	10	15	5	M5	26	21821			
C-209-12	●	40	30	15	10	15	3	M6	36	21822			
C-209-13	●	40	30	15	10	15	6	M6	38	21823			
C-209-14	●	50	40	20	10	20	6	M8	66	21824			
C-209-15	●	60	50	25	10	25	10	M10	132	21825			
C-209-21	●	40	30	15	13	15	5	M5	26	21826			
C-209-22	●	40	30	15	13	15	3	M6	36	21827			
C-209-23	●	40	30	15	13	15	6	M6	38	21828			
C-209-24	●	52	40	20	15	20	6	M8	72	21829			
C-209-25	●	60	50	25	15	25	10	M10	135	21830			
C-209-31	●	55	45	15	/	15	5	M5	48	23538			
C-209-32	●	55	45	15	/	15	3	M6	36	23539			
C-209-33	●	55	45	15	/	15	6	M6	52	23540			
C-209-34	●	70	60	20	/	20	6	M8	88	23541			
C-209-35	●	85	75	25	/	25	10	M10	192	23542			
C-209-41	●	/	/	/	/	/	5	M5	62	23667			
C-209-43	●	/	/	/	/	/	6	M6	68	23668			

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。

※大量のご注文は更にお安くなります。

ファスナー・ラッチ錠・キャッチ

ファスナー

ラッチ錠

ドア

キャッチ

スナッチ

ロック

コントロール

センター

パイプ

関連金具

グレーチング

ロック

工業用

錠前

電磁波

対策

パッキン

窓枠・カード

ホルダー

ゴム脚・

グロメット

PERIPHERA EQUIPMENT 周辺機器 (C)

充電器用

金具

フリーザー

金具

ラッシング

システム