





C-30-BW-19-2-EP-UL
標準色は黒です。
Standard color: Black



特注 (Gray)
グレー



特注 (Green-gray)
グリーングレー

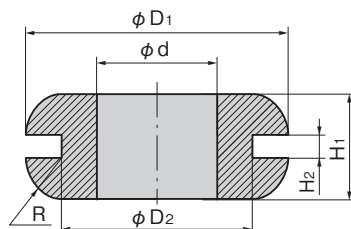

特徴 Feature

- 難燃材 (UL94 V-0適合) を使用。
- 豊富な種類の中から用途に応じて選択できます。
- 非移行性ゴム (汚染試験 JIS K6267 異常なし)
- Flame-retardant rubber (conforms to UL94 V-0) is used.
- Select among various types according to your application.
- Non-transmutation rubber. (No abnormalities with JIS K6267 stain test)

仕様	● 材 質: エチレンプロピレンゴム (EPDM)
	● 硬 度: 50° ±5°
	● 使用周囲温度: 70℃まで
用途	● 配分電盤・制御盤・計測機器などの配線引出し口
納期	● 標準在庫品
備考	● カラー製品も製作します。
	● シロキ酸ガスを抜いたシリコン製も製作します。
	● 従来のグレー色はグリーングレー色に標記を変更しました。

Specifi-cations	● Material: Ethylene propylene rubber (EPDM)
	● Hardness: 50° ±5°
	● Ambient temperature: up to 70℃
Specific-use	● Wire draw entrance for power/distribution and control boards and measuring equipment
Remarks	● Conventional gray has changed to the designation green-gray.

商品番号 Product No.	RoHS 10	H ₁	H ₂	φD ₁	φD ₂	φd	R	製品質量 (g) Mass	コード Code
C-30-BW-6-1-EP-UL	●	7	1	18	12	6	3	2.5	24173
C-30-BW-6-2-EP-UL	●	8	2	18	12	6	3	2.5	24174
C-30-BW-8-1-EP-UL	●	7	1	20	14	8	3	2.5	24175
C-30-BW-8-2-EP-UL	●	8	2	20	14	8	3	2.5	24176
C-30-BW-10-1-EP-UL	●	8	1	22	16	10	3	3.5	24177
C-30-BW-10-2-EP-UL	●	9	2	22	16	10	3	3.5	24178
C-30-BW-12-1-EP-UL	●	10	1	26	19	12	4	5.0	24179
C-30-BW-12-2-EP-UL	●	11	2	26	19	12	4	6.0	24180
C-30-BW-14-1-EP-UL	●	10	1	29	22	14	4	6.0	24181
C-30-BW-14-2-EP-UL	●	11	2	29	22	14	4	7.0	24182
C-30-BW-16-1-EP-UL	●	10	1	32	25	16	4	8.0	24183
C-30-BW-16-2-EP-UL	●	11	2	32	25	16	4	8.5	24184
C-30-BW-19-1-EP-UL	●	12	1	35	28	19	5	9.5	24185
C-30-BW-19-2-EP-UL	●	13	2	35	28	19	5	10.0	24186
C-30-BW-22-1-EP-UL	●	12	1	40	32	22	5	15.0	24187
C-30-BW-22-2-EP-UL	●	13	2	40	32	22	5	15.0	24188
C-30-BW-25-1-EP-UL	●	14	1	44	36	25	6	20.0	24189
C-30-BW-25-2-EP-UL	●	15	2	44	36	25	6	20.0	24190
C-30-BW-28-1-EP-UL	●	14	1	48	40	28	6	25.0	24191
C-30-BW-28-2-EP-UL	●	15	2	48	40	28	6	25.0	24192
C-30-BW-32-1-EP-UL	●	18	1	52	44	32	8	30.0	24193
C-30-BW-32-2-EP-UL	●	19	2	52	44	32	8	30.0	24194
C-30-BW-36-1-EP-UL	●	18	1	56	48	36	8	35.0	24195
C-30-BW-36-2-EP-UL	●	19	2	56	48	36	8	35.0	24196
C-30-BW-45-1.5-EP-UL	●	15.5	1.5	75	55	45	7	55.0	24197
C-30-BW-45-3-EP-UL	●	17	3	75	55	45	7	55.0	24198

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。