



## LE-127

プラスチック製

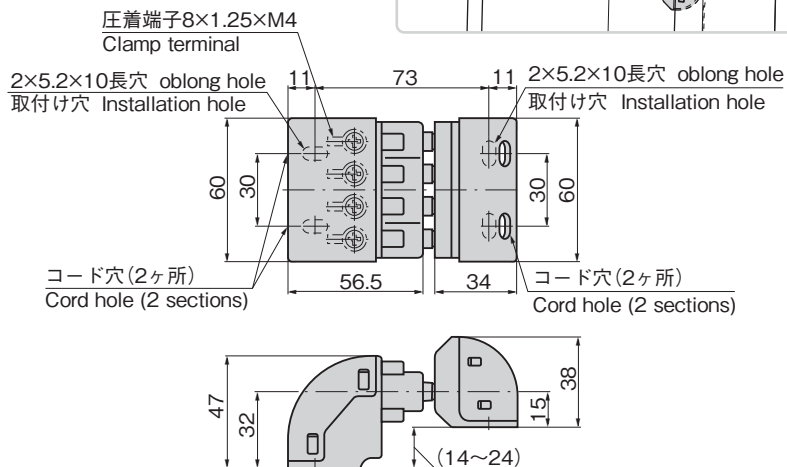

LE-127

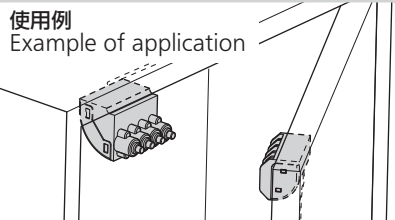

## ドアコネクタ

DOOR CONNECTERS

## 特徴 Feature

- 扉を閉じた時のみ通電するので、開扉時にコードなどが邪魔になりません。
- 配線が簡単にできます。
- Current flows only when the door is closed, so that the cord will not become obstructive to opening the door.
- Wiring can be easily performed.

## 仕様

- 材質: ポリカーボネート (PC)
- 接点: 銀めっき
- 圧着端子: 1.25S付
- 接点容量: DC24V 5A以下
- 接触抵抗: 30mΩ以下
- 耐電圧: AC1500V/1分間

## 用途

- 特装車・バン型車などの扉～フレーム間の通電

## 納期

- 標準在庫品

## 備考



- 接点は独立した4接点で銀めっき付です。
- 本品はコネクタのため通電中の開閉操作は避けてください。
- 本品は防水機能を設けておりません。
- 本製品は非結晶性樹脂材を使用しており、緩み防止剤に対して適合しないため、ご使用は避けてください。(一部の緩み防止剤の注意事項にも記載があります。)

## Specifications

- Material: Polycarbonate (PC)
- Contact: Silver plating
- Clamp terminal: With 1.25S
- Contact capacity: DC24V 5A or less
- Contact resistance: 30mΩ or less
- Withstand voltage: AC1500V/one minute

## Specific-use

- For current carrying between the frames and the door of special equipped vehicles and vans.

## Remarks



- The connector has the 4 independent contact points which are plated with silver.
- This item is a connector: avoid opening or closing the door while the power is flowing.
- This item is not water-resistant.
- This product uses noncrystalline resin. It is not suitable for thread-locking fluid so use should be avoided. (Also noted in the precautions of some types of thread-locking fluid.)

商品番号 Product No.	RoHS 10	製品質量 (g) Mass	コード Code
LE-127		170	50127

●: RoHS10指令対応品

▲: RoHS10指令に対応可能です。