

# K-900A

鉄製



K-900A



K-900A-S1



K-900A-S2


## 特徴 Feature

- 小型で軽量なため広範囲に利用できます。
- 側面取付けタイプ
- 床面に多少凸凹があっても確実にロックできます。
- Small-sized and lightweight and widely used.
- Side attachment type.
- Can be locked securely even if floor is a little uneven.



仕様	● 材質：本体／熱間圧延鋼板 (SPHC) 接地部／ゴム ● 表面仕上：亜鉛めっきクロメート処理 (MFZn-C)
用途	● ドア・門扉・運搬器具・事務用機器・その他移動防止用
納期	● 標準品・・・納期お問合せください
備考	● ロック解除の状態では床面とベースゴムの間隔を約25～30mmに取付けてください。 ● 取付け穴は左・右5個ありますので適当な穴を選び、ボルト・ねじなどで取付けてください。

Specifications	● Material: Main body: Hot rolled steel plate (SPHC) Ground contact part: Rubber
Specification	● Finish: Zinc plating chromate treatment (MFZn-C)
Remarks	● For stoppers for door, gate door, carrying and office and other equipment ● Set up so that there is a gap of 25mm to 30mm between the floor and the base rubber when the pedal is in the unlocked position. ● Installing holes are left and right five each. Use appropriate holes and fix with bolts and screws.

## 使用例 Example of application

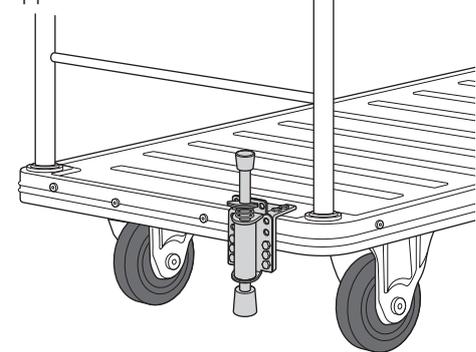

## 使用例 Example of application

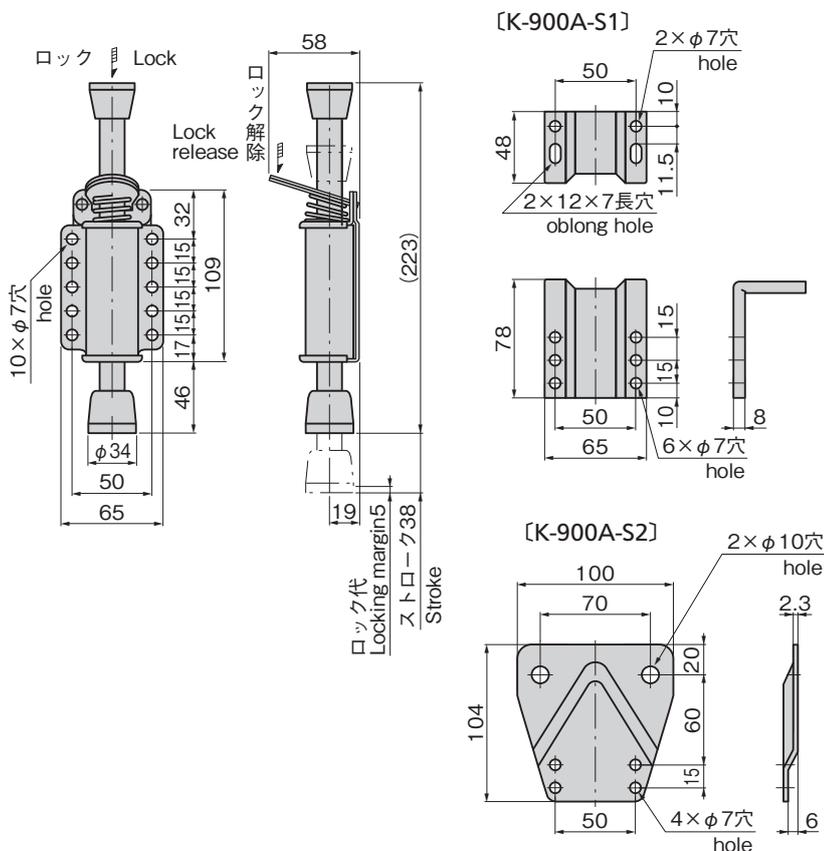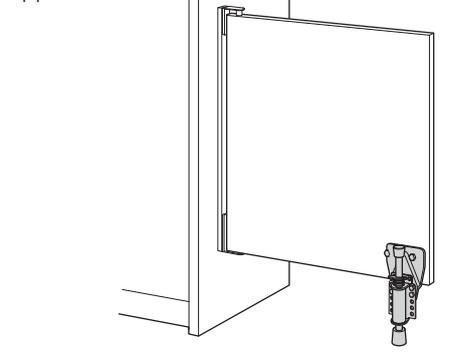

商品番号 Product No.	RoHS 10	製品質量 (g) Mass	コード Code
K-900A	●	450	30501
K-900A-S1	●		30502
K-900A-S2	●		30503

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。