



- モーター駆動錠を使用したインターロックシステム
- It's an interlocking system using motor drive lock.

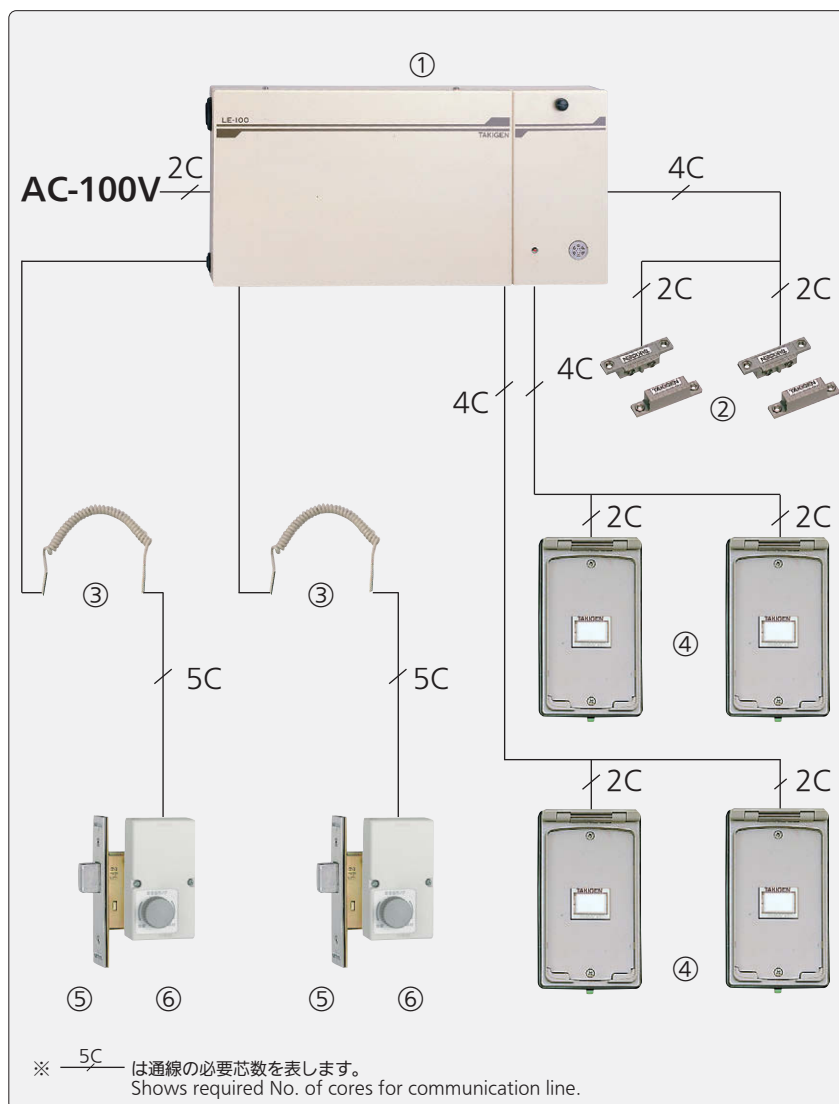

〈設置例〉
Example of
installation

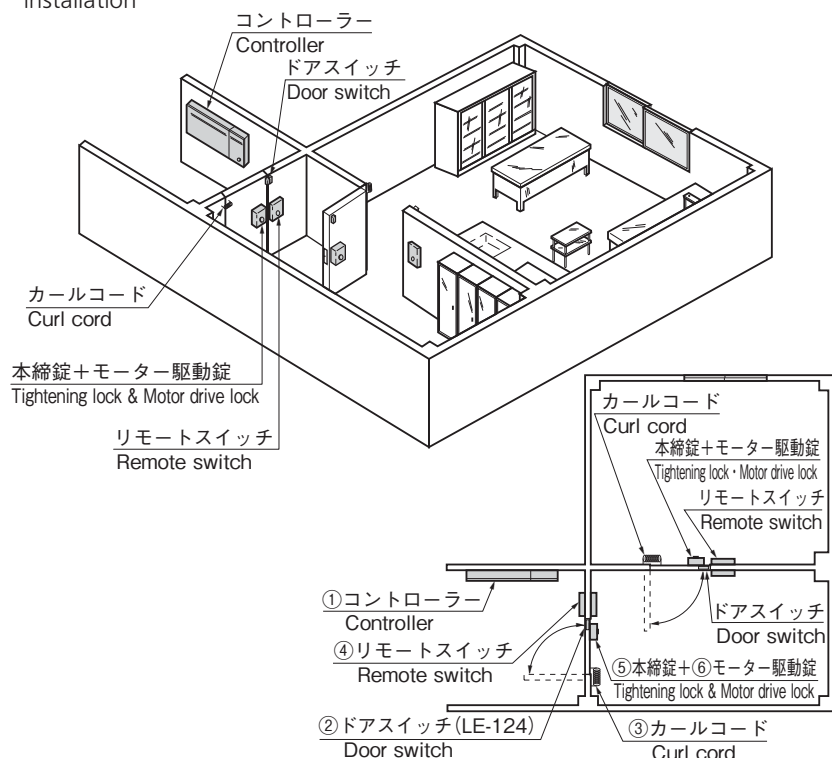

仕様

- モーター駆動錠(電気錠)を使用したインターロックシステムです。(通常2枚の扉は施錠状態)
- 標準システム機器
 - ① コントローラー (LE-111)
 - ② ドアスイッチ (LE-124)×2
 - ③ カールコード (LE-129)×2
 - ④ リモートスイッチ (LE-122)×4
 - ⑤ 本締錠 (C-374)×2
 - ⑥ モーター駆動錠 (LE-142)×2
- 作動概要
 - ① 通常2枚の扉は施錠状態
 - ② この時どちらの扉の電気錠でもリモートスイッチで解錠することができます。
 - ③ 一方の扉の電気錠をリモートスイッチで解錠
 - ④ この時他方の扉の電気錠は、リモートスイッチを操作しても解錠されません。
 - ⑤ ③で解錠した扉を開けた後閉めると自動的に施錠されます。
 - ⑥ 施錠が完了された時点で①の状態に復帰します。
 - ⑦ この時点で他方の扉を開けることができます。(後戻りも可能)

用途

- 工場・研究所・病院などのクリーンスペース
- 特注品・・・納期お問合せください
- 機器内には配線コードは含まれません。
- ドアノブとは別に本錠錠を取り付け使用します。
- 入室者の制限を行いたい場合は外側ドアのリモートスイッチ(LE-122)のかわりにカードキースwitch(S-500)を設置することにより、カード保持者のみ入室可能となります。
- ドアチェック(ドアクローザー)を使用することによってコントローラーの機能が十分に生かされます。
- その他詳細につきましてはお問合せください。

Specifications

- Interlocking system using motor drive lock (electric lock) (normally two doors are unlocked)
- Standard system equipment
 1. Controller (LE-111)
 2. Door switch (LE-124) X 2
 3. Curl cord (LE-129) X 2
 4. Remote switch (LE-122) X 4
 5. Tightening lock (C-374) X 2
 6. Motor drive lock (LE-142) X 2
- Operation outline
 1. Normally two doors are unlocked.
 2. At this time, either door electric lock can be released with remote switch.
 3. One door electric lock is released with remote switch.
 4. At this time, the other door electric lock is not released even if remote switch is operated.
 5. When unlocked door in step 3 is opened and closed, it's automatically locked.
 6. On completion of locking, this returns to step 1
 7. At this time, the other door can be opened. (reverse order possible)

Specific use	
Remarks	

- Clean spaces for factory, laboratory, hospital etc.
- Wiring cord is not included.
- Tightening lock is installed separately from the door knob.
- For limits on people entering: card keyswitch (S-500) is installed instead of outer door remote switch (LE-122) so that only card holder person can enter.
- Door check (door closer) helps controller to fully function.