



KC-251-12

特徴 Feature

- スライド部はボールベアリングを使用し動きがスムーズです。
- Slide section uses ball bearing so movement is smooth.

[KC-1251]

- 仕様 ● 材質：ステンレス鋼板(SUS304)
- 納期 ● 標準在庫品

[KC-251]


- 仕様 ● 材質：冷間圧延鋼板(SPCC)
- 表面仕上：亜鉛めっきクロメート処理(MFZn-C)
- 用途 ● コンピュータ周辺機器・自動販売機・複写機・通信機・医療機器
- 納期 ● 標準在庫品
- 備考 ● 収納方向にストッパー機構はありません。ストッパーは別途設けてください。
- 取付けにはM4バインド小ねじまたは、トラス小ねじをご使用ください。
- 抜差しタイプKC-251-Aも製作します。
- 本品は未永くご使用いただくために定期的に摺動部に潤滑剤の塗布をお願いします。(推奨潤滑剤：リチウム石鹸基系極圧グリース)

[KC-1251]

- Specifications ● Material: Stainless steel plate (SUS304)

[KC-251]

- Specifications ● Material: Cold rolled steel plate (SPCC)
- Finish: Zinc plating chromate treatment (MFZn-C)
- Specif-ications ● Computer peripherals, vending machines, photocopiers, communication and medical equipment.
- Specif-ications ● No stopping mechanism located in the storage direction. Install a stopper separately.
- Remarks ● Please use M4 binding head machine screws or truss head screws for installation.
- To prolong use, it is recommended that a lubricant be applied regularly to the sliding parts. (Recommended grease: Lithium-soap base extreme-pressure grease)

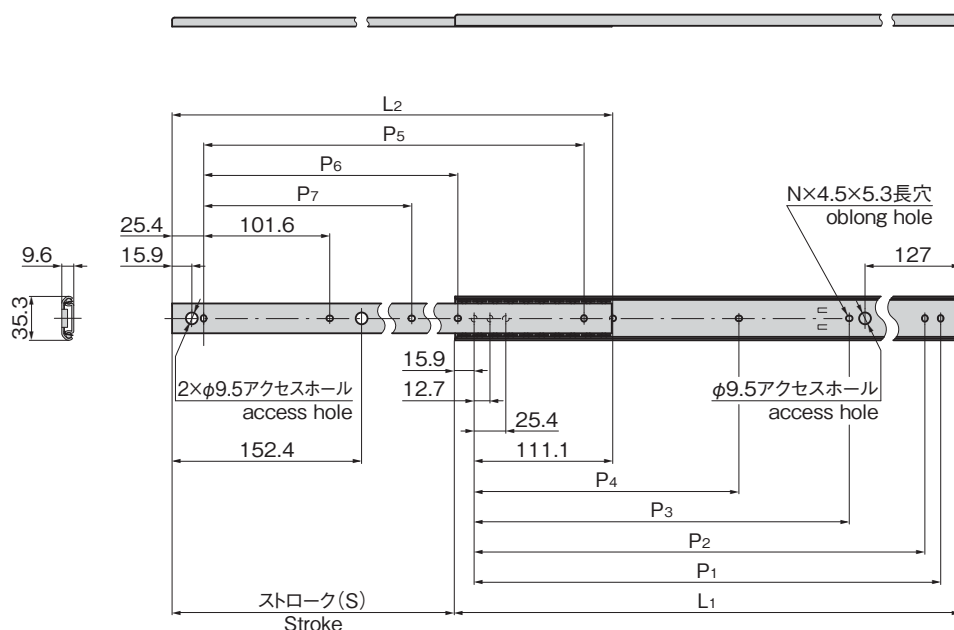

使用例 Example of application



板金加工品も製作可能です。
お問合せください。

商品番号 Product No.	RoHS 10v	備考 Remarks	L1	L2	P1	P2	P3	P4	P5	P6	P7	N	(S)	許容荷重 N/pair Allowable load	製品質量 (g) Mass	コード Code
KC-251-12	●	SPCC	304.8	301.8	273	260.3	149.2		254	152.4		11	226	314	310	20594
KC-1251-14	●	SUS	355.6	352.6	323.8	311.1	200		304.8	203.2			277	284		809298
KC-251-14	●		355.6	352.6	323.8	311.1	200		304.8	203.2			277	284	370	20595
KC-251-16	●		406.4	403.4	374.6	361.9	250.8		355.6	254			302	353	415	20596
KC-251-18	●	SPCC	457.2	454.2	425.4	412.7	301.6	212.7	406.4	304.8	203.2	13	328	422	480	20597
KC-251-20	●		508	505	476.2	463.5	352.4	238.1	457.2	355.6	228.6		379	392	500	20598
KC-1251-22	●	SUS	558.8	555.8	527	514.3	403.2	263.5	508	406.4	254		404	441		809299
KC-251-22	●		558.8	555.8	527	514.3	403.2	263.5	508	406.4	254		404	441	570	20599
KC-251-24	●	SPCC	609.6	606.6	577.8	565.1	454	288.9	558.8	457.2	279.4		430	441	635	20600
KC-251-26	●		660.4	657.4	628.6	615.9	504.8	314.3	609.6	508	304.8		480	412	685	20601
KC-1251-28	●	SUS	711.2	708.2	679.4	666.7	555.6	339.7	660.4	558.8	330.2		506	412		809300
KC-251-28	●	SPCC	711.2	708.2	679.4	666.7	555.6	339.7	660.4	558.8	330.2		506	412	735	20602

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。