



AP-140-1-1  
N7



AP-140-2-1  
5Y7/1




キーNo.2001  
Key

特徴 Feature


- 防水タイプ(Oリング・シートパッキン使用)
- 亜鉛合金がインサートされております。
- 耐酸・耐絶縁性を必要とする扉に最適
- 左右兼用型
- Waterproof (using O-ring and sheet packing)
- Zinc alloy is inserted.
- Suitable for doors that require acid-resistance and insulation.
- For both left-hand and right-hand use.

仕様	<ul style="list-style-type: none"> <li>● 材質: ABS樹脂</li> <li>● 標準色: N7(グレー) 5Y7/1(アイボリー)</li> <li>● 保護等級: IPX5(AP-140-2)</li> <li>● 鍵番号: 2001</li> <li>● 付属品: 大ナット・ビスセット(止め金用)・キー2本</li> </ul>
用途	● 隧道用配分電盤
納期	● 標準在庫品
備考	<ul style="list-style-type: none"> <li>● ダブルOリングの完全防水タイプも製作します。製作ロットはご相談ください。</li> <li>● 止め金は640~644ページの中からお選びください。</li> <li>● マスターシステムの組込みが可能です。</li> <li>● 常温でご使用ください。</li> <li>● 施錠錠は錠前の構造上、鍵を押しながら回してください。</li> <li>● 本製品の止め金取付け用ねじは、緩み防止のため「緩み防止剤」の塗布をお奨めします。</li> <li>● 緩み防止剤など、溶剤を使用する際は十分に換気を行ってください。</li> </ul>

Specifications	<ul style="list-style-type: none"> <li>● Material: ABS resin</li> <li>● Standard color: N7: Gray, 5Y7/1: Ivory</li> <li>● Protection class: IPX5(AP-140-2)</li> <li>● Key No.: 2001</li> <li>● Accessories: Large nut, screws for stopper plate, two keys</li> </ul>
Specific use	● Tunnel power/distribution boards
Remarks	<ul style="list-style-type: none"> <li>● Select stopper plate on page 640 to 644.</li> <li>● Use this product in normal temperatures.</li> <li>● Due to the structure of the lock, the key must be pushed in as it is turned in order to release the lock.</li> <li>● It is recommended that thread-locking fluid be used to prevent loosening of the mounting screws for the catch.</li> <li>● Be sure to test adequately when using a solvent such as thread-locking fluid.</li> </ul>

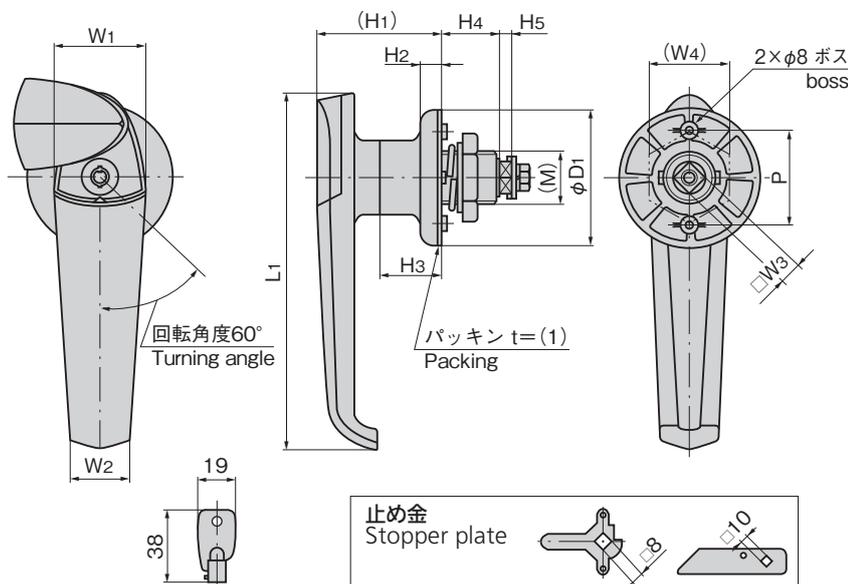

パネル穴明け寸法  
Panel drilling dimensions



商品番号 Product No.	RoHS 10	備考 Remarks	L1	L2	W1	W2	□W3	(W4)	(H1)	H2	H3	H4	H5	P	φD1	φD2	φD3	(M)	最大適用板厚 Max. applicable panel thickness	製品質量(g) Mass	コード Code
AP-140-1-1-N7	●	鍵付き With lock	158	7	40	25	10	42	61	9	26	24	6	50	70	25	30	M24	9.5	520	00314
AP-140-1-1-5Y7/1	▲																				01038
AP-140-1-2-N7	●	鍵なし Without lock	158	7	40	25	10	42	61	9	26	24	6	50	70	25	30	M24	9.5	520	00316
AP-140-1-2-5Y7/1	▲																				01039
AP-140-2-1-N7	●	鍵付き With lock	122	6	32	20	8	32	55	7	31	20	4	40	60	23	27	M22	7	330	00318
AP-140-2-1-5Y7/1	▲																				01040
AP-140-2-2-N7	●	鍵なし Without lock	122	6	32	20	8	32	55	7	31	20	4	40	60	23	27	M22	7	330	00320
AP-140-2-2-5Y7/1	▲																				01041

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。