

いたずら防止に高い効果



C-1328N-B
(ボルト側用)
Bolt side



C-1328N-A
(ナット側用)
Nut side



特徴 Feature

- ねじ頭をキャップでカバーするため安全です。
- キャップを軽く押込むだけの簡単取付け
- サークリップがキャップの溝にはまり、空回りして抜けません。
- This set cap covers a screw head to ensure safety.
- Easy installation: Lightly squeeze the cap onto a screw head.
- The set cap never comes off because its retaining ring snaps into the cap groove and spins freely.

仕様	● 材 質: ステンレス鋼(SUS304)
用途	● ナットとボルトの取外し防止
納期	● 標準品・・・納期お問合せください
備考	● 取付けると外れません。取扱いに十分ご注意ください。 ● ボルトとナットで締付けている配管フランジのような場合は、両側に使用します。キャップはナット側用とボルト側用の二つのタイプがあります。 ● 取外し工具を必要とする場合は、ご相談ください。工具を使用する場合は、φ60mmの設置面と130mmの高さを設計上設けてください。 ● キャップと座金のセット価格です。 ● C-1328-A-16、C-1328-B-16、C-1328N-A-12、C-1328N-B-12は中止品になりました。




Specifications	● Material: Stainless steel (SUS304)
Specific use	● Preventing the removal of nuts and bolts
Remarks	● Handle a set cap with sufficient care. It cannot be removed once it is snapped on. ● Install set caps on both ends of piping flanges fastened using bolts and nuts. Two types of caps are available: those for nuts and for bolts. ● Consult with TAKIGEN if a demounting tool is required. To use a tool, provide an installation area 60mm in diameter and 130mm in height at the design stage. ● These prices are for a set of caps and washers. ● Products C-1328-A-16 and C-1328-B-16, C-1328N-A-12, C-1328N-B-12 are no longer manufactured.




〔キャップ側〕
Cap


〔座金側〕
Washer

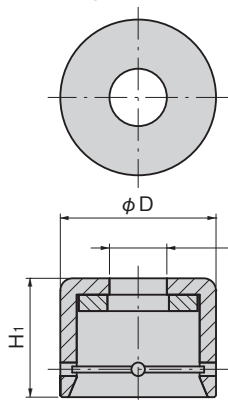

C-1328N-A・B・C


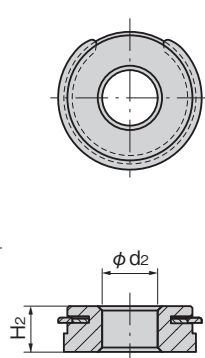


C-1328N-A・B

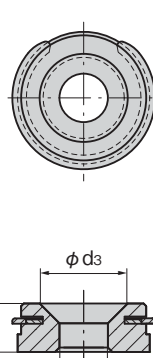

C-1328N-C

使用例 Example of application

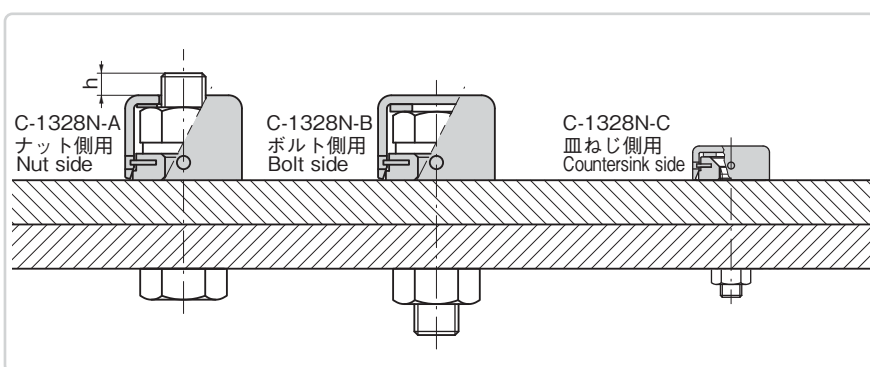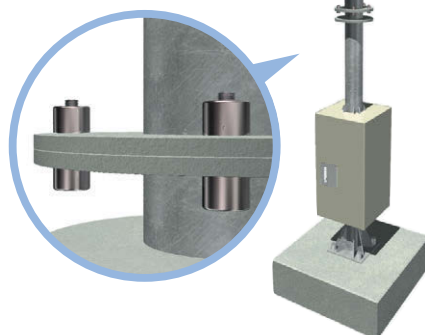

商品番号 Product No.	RoHS 10	備 考 Remarks	φD	φd ₁	φd ₂	φd ₃	H ₁	H ₂	h	コード Code
C-1328N-C-4	●	M4皿ねじ用 Countersink	18	4.5	9	8	5.5			24719
C-1328N-C-5	●	M5皿ねじ用 Countersink		5.5						10
C-1328N-A-6	●	M6ナット用 Nut	19	7	6.3	14.5	5.2	6以下less		24721
C-1328N-B-6	●	M6ボルト用 Bolt								
C-1328N-A-8	●	M8ナット用 Nut	22.3	8.5	8.2	17	6	8以下less		24723
C-1328N-B-8	●	M8ボルト用 Bolt								
C-1328N-A-10	●	M10ナット用 Nut	26	11	10.3	19	6	10以下less		24725
C-1328N-B-10	●	M10ボルト用 Bolt								

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。