

特装周辺機器

FD-1071N
ステンレス製


FD-71N
鉄製

バス、特装車など大型車両のリッドに最適

Perfect for lids on large vehicles such as buses and specially equipped vehicles



FD-71N-1-15K

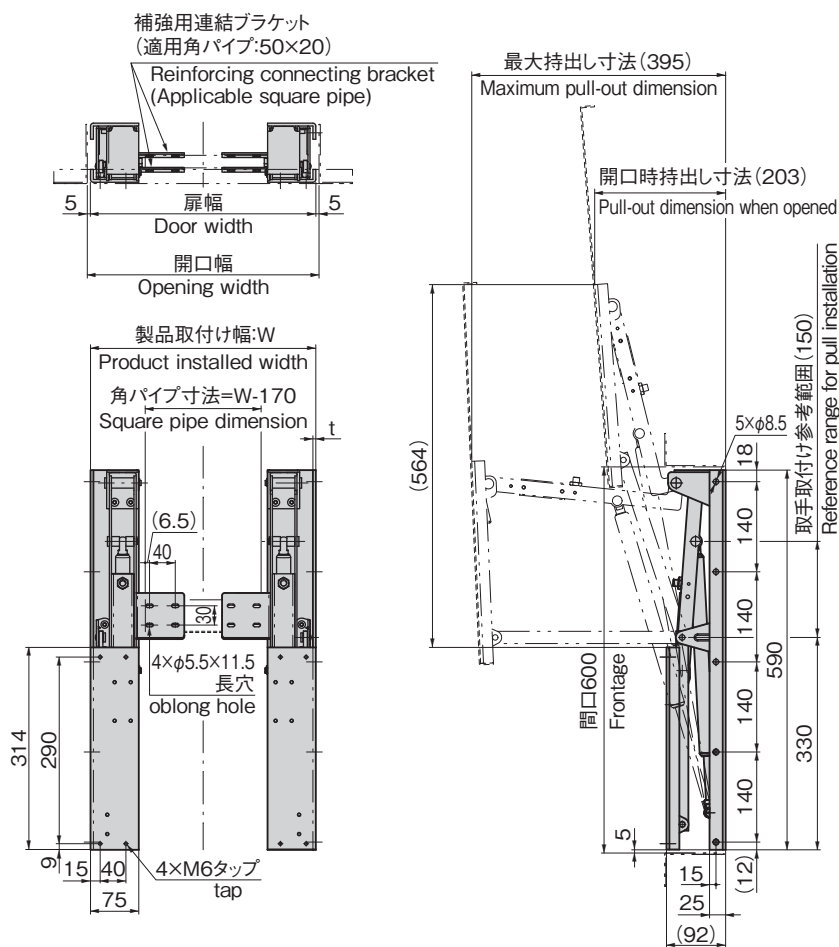

商品番号 Product No.	RoHS 10	t	参考扉質量(g) Door mass (reference)	製品質量(g) Mass	コード Code
FD-1071N-1-15K		4	15,000±1000	9,800	64270
FD-1071N-1-30K		4	30,000±1000	9,800	64271
FD-71N-1-15K		4.5	15,000±1000	10,800	64268
FD-71N-1-30K		4.5	30,000±1000	10,800	64269

●: RoHS10指令対応品 ▲: RoHS10指令に対応可能です。

New

SUS
ステンレス

リフトドア金具
LIFT DOOR FITTINGS

特徴 Feature

- 縦枠に取付けられる省スペース設計
 - ユニット化しており取付けが簡単です。
-
- Space-saving design, mounts on vertical frames
 - Assembled as a unit for easy installation.

[FD-1071N]

- 仕様 ●材質: ステンレス鋼板(SUS304)
●表面仕上: 光沢バレル研磨

[FD-71N]

- | | |
|----|---|
| 仕様 | <ul style="list-style-type: none"> ● 材 質：熱間圧延鋼板(SPHC) ● 表面仕上：亜鉛めっきクロメート処理(MFZn-C) |
| 用途 | ● バス・特装車・製造装置などのリッド |
| 納期 | ● 標準品・・・納期お問合せください |
| 備考 | <ul style="list-style-type: none"> ● 扉の剛性が低い場合や開口幅が大きい場合は、補強用連結ブラケットに指定の角パイプを連結してください。 ● 取手などは扉中央部に配置してください。 ● 取手はAP-883やA-873、ドアキャッチはC-1851、コントロールセンターはC-878などをご使用ください。 |

[FD-1071N]

- Material: Stainless steel sheet (SUS304)
- Finish: Gloss barrel polishing

[FD-71N]

- | | |
|----------------|---|
| Specifications | <ul style="list-style-type: none"> ● Material: Hot-rolled steel plate (SPHC) ● Finish: Zinc plating chromate (MFZn-C) |
| Specific use | <ul style="list-style-type: none"> ● Lids on buses, specially equipped vehicles, manufacturing equipment |
| Remarks | <ul style="list-style-type: none"> ● Be sure to join specified square pipe to the reinforcing connecting brackets if door has low rigidity or the opening is wide. |

使用例

Example of application

